

12-20-99
COMMISSIONER OF PATENTS AND TRADEMARKS
BOX PATENT APPLICATION
Washington, D.C. 20231

A
CASE DOCKET NO. YO999-429
Date: December 17, 1999

12/17/99
Submitted herewith for filing is the Patent Application of:

Inventors: Ming-Ling Lo and Shyh-Kwei Chen

For: METHOD AND APPARATUS FOR CONVERTING BETWEEN
DATA SETS AND XML DOCUMENTS

Enclosed are:

Express Mail Label: EL532335052US
Date of Deposit: 12/17/99

☒ Eleven(11) Sheets of Informal Drawings.

☒ An assignment of the invention to International Business Machines Corporation, Armonk, New York 10504.

☐ Certified copy of UK Patent Application No.

☒ Declaration and Power of Attorney is attached to the application.

☐ Associate Power of Attorney.

☐ Information Disclosure Statement with form PTO-1449 with references attached.

The filing fee has been calculated as shown below:

	(Col. 1)	(Col. 2)
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	75 - 20 =	55
INDEP CLAIMS	3 - 3 =	0
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIM PRESENTED		

OTHER THAN A
SMALL ENTITY

RATE	FEE
	\$ 760.00
X \$ 18 =	\$ 990.00
X \$ 78 =	\$
+ \$ 260 =	\$
TOTAL	\$ 1750.00

If the difference in Col. 1 is less than zero, enter "0" in Col. 2.

☒ Please charge my Deposit Account No. 09-0468 in the amount of \$1750.00.

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 09-0468. A duplicate copy of this sheet is enclosed.

☒ Any additional filing fees required under 37 CFR 1.16.

☒ Any patent application processing fees under 35 CFR 1.17.

Respectfully submitted,

By Wayne L. Ellenbogen
Attorney: Wayne L. Ellenbogen
Registration No.: 43,602
Tel. (914) 945-2322

IBM CORPORATION
INTELLECTUAL PROPERTY LAW DEPT.
P.O. BOX 218 - 38-255
YORKTOWN HEIGHTS, NY 10598

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: Ming-Ling Lo et al.

Serial No.:

Group No.

Filed: Herewith

Examiner:

For: METHOD AND APPARATUS FOR
CONVERTING BETWEEN DATA SETS
AND XML DOCUMENTS

Commissioner of Patents and Trademarks
Washington, D.C. 20231

EXPRESS MAIL CERTIFICATE

Express Mail Label Number EL532335052US

Date of Deposit December 17, 1999

I hereby certify that the attached paper or fee

Patent Application Transmittal Letter (original and one copy)

Patent Application

Declaration and Power of Attorney

Assignment

Assignment Transmittal Sheet

Informal Drawings (11 Sheets)

Associate Power of Attorney


Information Disclosure Statement (with references)

Return Postcard

is being deposited with the United States Postal Service - Express Mail Post Office to Addressee - service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Lucille Fourgeot

(Name)



Signature

Note: Each paper must have its own certificate and the - Express Mail - label number as a part thereof or attached thereto. When, as here, the certification is presented on a separate sheet, that sheet must (1) be signed and (2) fully identify and be securely attached to the paper or fee it accompanies. Identification should include the serial number and filing date of the application as well as the type of paper being filed, e.g. complete application, specification and drawings, responses to rejection or refusal, notice of appeal, etc. If the serial number of the application is not known, the identification should include at least the name of the inventor(s) and the title of the invention.

Note: The label number need not be placed on each page. It should, however, be placed on the first page of each separate document, such as, a new application, amendment, assignment, and transmittal letter for a fee, along with the certificate of mailing by - Express Mail -. Although the label number may be on checks, such a practice is not required. In order not to deface formal drawings it is suggested that the label number be placed on the back of each formal drawing or the drawings be accompanied by a set of informal drawings on which the label number is placed.

Docket No. YO999-429

**METHOD AND APPARATUS FOR CONVERTING BETWEEN
DATA SETS AND XML DOCUMENTS**

5

10

Patent application by

Inventors:

Ming-Ling Lo

Shyh-Kwei Chen

15

Drafting attorney

Anne E. Barschall

Reg. No. 31,089

RELATED APPLICATIONS

The present application claims the benefit U.S.
provisional patent application serial number 60/160,334
5 filed October 19, 1999, which is incorporated herein by
reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The invention relates to the field of conversion of
data from one format to another within a digital data
processing device or devices.

2. Background of the invention

XML ("Extensible Markup Language") is a proposed
standard for exchanging semi-structured data. It can be
used as an alternative to HTML. . More information about
XML can be found in "Extensible Markup Language (XML) 1.0:
20 W3C Recommendation 10-February 1998"
<http://www.w3.org/TR/REC-xml> and in E.H. Harold, XML
Extensible Markup Language, (IDG Books 1998).

It is expected that the consumption of XML documents
will continue to grow. Business entities increasingly
25 exchange XML documents as part of their business logic flow.
Several technical and business organizations have published

XML schemes for key document types in specific domains. Web sites such as www.xml.org have been established to coordinate such activities and maintain XML schemes. Existing and new applications also increasingly use XML as their input and output format. Major software vendors, such as those of browsers and relational and object databases, have either provided or announced support for the XML format, while many applications are being enhanced with XML capabilities. If data must be taken manually from other data sources, and integrated into XML documents, then data exchange is slowed.

In A. Deutsch et al, "Storing Semistructured Data with STORED", SIGMOD '99, International Conf. Management of Data, Philadelphia PA (ACM 1999), pp. 431-442 a language is proposed for mapping data from relational databases to XML. This technique has the disadvantage that, since it uses relational query constructs directly in the mapping language, it can apply only to relational databases.

SUMMARY OF THE INVENTION

It is an object of the invention to create a mapping suitable for mapping from several types of data sources to XML.

This object is achieved by use a mapping that establishes a correspondence between entities in a data source on the one hand and lists and scalars on the other hand. The language maps the lists and scalars to XML elements and attributes. For the purpose of this application a scalar is a single value and a list is a list of values.

Preferably the mapping involves a mapping language having two types of statements, value specifications and binding specifications.

Preferably also the mapping language is insertable directly in a DTD for a target XML document.

Other objects and advantages shall be apparent from the following.

BRIEF DESCRIPTION OF THE DRAWING

The invention will now be described by way of non-limiting example with reference to the following figures:

Fig. 1 shows a digital data processing system on which the invention can be implemented.

Fig. 2 shows an overview of the function of the invention in context.

Fig. 3a shows an example purchase order relational schema.

Fig. 3b shows an example DTD

Fig. 4 shows conceptually a mapping between a table and
5 a displayed version of an XML document.

Fig. 5 shows an example of an annotated DTD ("DTDSA") in accordance with the invention.

Figs. 6a & b show an algorithm for establishing the mapping in DTDSA format

10 Figs. 7a & b show an algorithm for generating XML using a DTDSA

Fig. 8 shows an XML composition data flow

Fig. 9 shows an XML composition example with input
x=100

15 Fig. 10 shows a retrieved XML document (with input
x=100)

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

20 Definitions

In the column "Name given in", if the value is "here", that means the concept is used in the present document but not defined in the DTD spec. If the value is DTD, that means

the concept is referenced, sometimes appears in a production rule, but not explicitly defined in the DTD spec.

Note: Some of the terms are defined in a recursive manner.

Term	short hand	Definition	Name given in
repetition symbol		'?', '*', or '+'	here
element name	ENAME	Name used in a element type declaration	XML Spec
choice list	CLIST	a list of cp enclosed by '(' and ')', and separated by ' ', i.e. "(cp cp ... cp)".	XML Spec
terminal choice list	TCLIST	a list of "#PCDATA" and ENAMES, each appearing only once, enclosed by '(' and ')', and separated by ' ', i.e. "(#PCDATA ENAME ENAME ... ENAME)"	here
sequence	SEQ	a list of cp enclosed by '(' and ')' and separated by ',', i.e. "(cp, cp, ..., cp)"	XML Spec
content unit	CU	ENAME, CLIST, SEQ, or TCLIST	here
content particle	CP	a content-unit followed optionally by a repetition symbol, i.e. (Name choice seq) ('?' '*' '+')?	XML Spec
content spec	content-spec	the part that matches 'contentspec' in the DTD production rules. That is, the part that follows ENAME and proceeds '>' in a DTD element type declaration.	XML Spec
children content spec	children	a content spec that is a choice or sequence content unit followed optionally by a repetition symbol	XML Spec
PCDATA	PCDATA	#PCDATA	XML

declaration			Spec
attribute definition	ATD	The part that includes an ENAME, a type, e.g., CDATA, ID, IDREF etc., and a default declaration.	XML Spec
value declaration		PCDATA declaration or attribute definition.	here
Element type declaration	ED	The part that includes a "<!ELEMENT", followed by an ENAME, content-spec, and a ">"	here
Attribute list declaration	AD	The part that includes a "<!ATTLIST", followed by an ENAME, a list of ATDs, and a ">"	here
DTD declaration		element type declaration and attribute list declaration	here
DTD construct		a DTD declaration, a (sub-expression of a) content spec, or a (sub-expression of an) attribute-list declaration	here

Fig. 1 shows a digital data processing system on which the invention can be implemented. The system will typically include a CPU 104, a memory device 106, a display device 101, data entry devices such as keyboard 102 and mouse 103, and a network connection 105. The CPU might be any kind of processor such as a PC, any other general purpose processor, parallel processing device, or distributed processing system. The memory device might be of any sort, such as a hard drive, a floppy drive, a zip drive, a CD-ROM drive, or

several such devices. Other devices for communication with a user might also be attached.

The network connection will commonly be an Internet connection, but it might also be an Intranet or other local network connection, such as a LAN. Both a local and an external network connection might be present.

The memory device 106 will commonly house data and software. The data will include data that a user may seek to communicate with the outside world or data to be used internally. The software might be of various sorts, including software for implementing the invention. However, the invention might also be implemented in hardware.

While the system shown has a local memory device 106, memory accessible via the network connection 105 might be used instead of a local memory device. Similarly, the CPU 104 might be remote from the display 101 and data entry devices 102 and 103.

A user might seek to communicate data to the external world under many different circumstances.

For instance, suppose a user tracks an inventory of supplies in a relational database within memory device 106. The database program will signal to the user when some inventory item, such as pencils, becomes low. The user may then wish to order the low inventory item via the Internet.

The order will typically be expected to be conveyed to the supplier in a standard format, such as an XML purchase order form. The user might fill out the XML purchase order form manually, but this could become burdensome if frequent
5 orders are to be undertaken. It would be desirable for the CPU 104 to convert the low inventory information from the relational database directly onto the standard XML purchase order form. When the inventory items arrive, it would also be desirable for the CPU 104 to convert a standard XML
10 invoice form into relational database information to be stored in the memory device 106.

Another situation where conversion of data might be desirable would arise in compiling web pages. A stockbroker, for example, might maintain a first data base
15 with a customer's investment portfolio information, a second data base with stock quotes, and a third data base with financial analysis information. The stockbroker might want to select and consolidate information from all three data bases to create customized customer web pages, where
20 individual customers could view investment advice. Again, the CPU should automatically convert data from the data bases into an XML document that is displayable as a web page.

The data to be converted need not be from a relational database. It might equally well be object-oriented, semi-structured, or other schemas. Using this framework, one DTD can correspond to multiple heterogeneous data sources, and single data sources may be associated with many different DTD's.

Those of ordinary skill in the art might recognize any number of other situations where conversion of data into XML would be desirable.

Fig. 2 shows a conceptual diagram of the role of the invention. On the left side of the figure, in known fashion, a schema 201 is used to control formatting of a data set 202, such as a relational database. On the right side of the figure, also in known fashion, a DTD 203 is used to control formatting of an XML document 204. In one aspect, the invention 205 is designed to use the schema 201, the data set 202, and the DTD 203 to create an XML document 204. Fig. 2 is only an example. The invention is designed to allow conversion between any data format and XML.

FIG. 3A illustratively includes four relational tables, also known as a relational schema, purchase order ("PO") 305, company 310, lineitem 315, and product 320.

Table 305 has three columns, purchase order identification ("POID"), buyer, and seller. The rows of the table have numerical index values pointing to values for the columns. Thus purchase order number 100 is associated with
5 buyer 20 and seller 10.

Table 310 has three columns: company identification ("COID"), name, and address ("ADDR"). The rows associate numerical values with actual company names and addresses. Thus the numerical value 10 is associated with the company
10 IBM, having an address in New York, and the numerical value 20 is associated with the company Citibank, also having an address in New York.

Table 315 has three columns: POID, product identification ("PRODID"), and amount. The rows, 330 and
15 335, associate purchase order identification numbers with product identification numbers and quantities. In the figure, purchase order 100 is associated with two product identifications, 35678 and 35694, of which 20k and 100k are ordered respectively.

20 Table 320 has three columns, PRODID, name, and desc. (description). The rows associate product identification 35678 with a "THINKPAD"® and product identification 35694 with a server.

Arrows in Fig. 3a illustrate foreign key relations among various fields. For example, the record 325 in *PO* table with *POID=100* is related via arrows 340 and 345 to two records 330, 335 in the *lineitem* table 315 with *POID=100*.

5 Similarly records 330 and 335 are associated via arrow 350 to records 355 and 360.

Fig. 3b shows a Document Type Definition ("DTD"). According to the known art, XML makes use of DTD's to specify documents. DTD's are very flexible and can specify
10 any number of different documents. Fig. 3b shows only one simple example, in which a purchase order is specified.

Line 301 shows the definition of the variable *PO*. In a tree-like fashion, the definition incorporates child definitions, i.e. "*id*" defined at line 302, "*buyer*" defined
15 at line 303, "*seller*" defined at line 304, and "*lineitem*" defined at line 307. The asterisk after "*lineitem*" at 320 indicates that this feature may be repeated any number of times in the purchase order. The definitions of "*id*" 302, "*address*" 311, "*prodname*" 308, and "*amount*" 309 use the
20 #PCDATA command to get data directly from a data storage device, e.g. 106. The definitions of "*buyer*" and "*seller*" have attribute lists at 323 and 324. The definition of *lineitem*, also incorporates child definitions, "*prodname*" at line 308 and "*amount*" at line 310.

Fig. 4 shows conceptually how data is to be mapped from a relational database into an XML document. Data, such as that referred to in the DTD of Fig. 3 is stored in a relational database in the form of tables 401. The tables have rows and columns, the columns being numbered 1, 2, 3, and 4 in the example. The database information is to be displayed in the form of fields A, B, C, D in the XML document 403. A mapping 402 sends data from the database to the document and back. A mapping might specify A <-> 1; B <-> 4; C <-> 2; and D <-> 3 -- OR a mapping might specify some other correspondence such as A <-> 3; B <-> 4; C <-> 2; D <-> 1.

In order to achieve such mappings, a mapping language is proposed. Preferably this mapping language is stored as annotations to the DTD. These annotations can be stored in a same computer file with the DTD or in a separate file. If the annotations are stored with the DTD, then they can be stripped off by a simple program prior to generating an XML document.

FIG. 3b is to be annotated based on the relational schema in FIG. 3a, and the resulting annotated DTD ("DTDSA") is illustrated in FIG. 5. Fig. 5 shows a DTD annotated in accordance with the preferred mapping language. The

preferred mapping language includes 2 types of constructs:
the binding specification and the value specification.

Value specifications

5 A value specification is only allowed to associate with
either a value or a choice declaration.

A value specification is a parameterized formula
containing variables, which, when a data object is
substituted for each variable in it, produces a text value.

10 The value specification has the following format:

VCD:*sf*

where VCD is a value or choice declaration, and *sf* is any
scalar-valued function.

15 Every value declaration in a DTDSA must have exactly
one associated value specification. Given a value
declaration ("VD") with a value specification ("VS") in some
DTDSA, the semantics of the combination is that in every
document instance of the DTDSA, the value of every
occurrence of VD is determined by VS. As noted earlier, VS
20 may have parameters.

Every choice declaration in a DTDSA must also have an
associated value specification. Given a choice declaration
CD with a value specification VS in a DTDSA, the semantics
of the combination is that in every document instance of the

DTDSA, the alternative taken in every occurrence of CD is determined by VS.

Suppose $CD = (C1|C2|...|Cn)$ and CD and VS appear as VS:

$(C1|C2 |...|Cn):VS$

5 There are two possibilities. If the value produced by VS is an integer I, with I between 1 and n, the alternative appearing in place of CD is C_i . Alternatively, if the value produced by VS is a string C_j , which matches one of the alternatives $C_1, C_2, ..., C_n$, the alternative taken in place of CD is C_j . If the value produced by VS falls in neither category, the alternative taken in place of CD is undefined.

10 In actual implementations, a user defined default alternative or some error reporting string can be used.

15 Consider the following example of a DTDSA with a value specification:

DTDSA JOB_DESCRIPTION:

<!ELEMENT JOB_DESCRIPTION (SALES|RESEARCH):f(x)>

<!ELEMENT SALES (#PCDATA:"Increase sales volume")>

<!ELEMENT RESEARCH (#PCDATA:"Develop new technology")>

20 where $f(x)$ has the definition:

$$f(x) = \left\{ \begin{array}{l} \text{"SALES", when } x = 1 \\ \text{"RESEARCH", otherwise} \end{array} \right\}$$

The XML document corresponding to the DTDSA given $x=1$ is:

<JOB_DESCRIPTION>

<SALES> Increase sales volume </SALES>

</JOB_DESCRIPTION>

5 Binding specification

10 A binding specification is a variable and expression pair. The expression can be a list of data objects, a formula that identifies a list of data objects, or a parameterized formula containing variables, which, when a data object is substituted for each variable in it, produces a list of data objects. The binding specification has the following format :

DC :: $x_1 := vf_1 :: x_2 := vf_2 \dots :: x_n := vf_n$

15 where DC is any DTD construct that is not a value or choice declaration, x_i is a variable, and vf_i is a binding function for $i=1,\dots,n$.

20 A binding specification serves two purposes. First, when immediately following a repetition symbol, it determines the number of times the DTD construct qualified by the repetition symbol repeats in the document instances. Second, it supplies values to the parameters appearing in other value or binding functions. The binding function of this binding specification may itself contain parameters

which obtain values from other binding specifications. This feature enables a set of mapping constructs to relate to one another and makes DTDSA flexible enough to represent a large and diverse set of XML documents.

5 There are parameters in the mapping constructs of a DTDSA that do not always obtain their values from other binding specifications. These parameters are called the input parameters of the DTDSA, and are used to identify specific documents among the set of document instances.

10

Binding variables and function parameters

15

To understand how binding specifications supply values to function parameters, it is necessary to introduce the concepts of ancestral relationships and contexts of DTD constructs.

20

Intuitively, if one envisions every DTD construct in a DTD as a node, and every containment relationship and name reference relationship as an edge, the DTD will form a graph. In most cases, this graph is a directed acyclic graph (DAG), with the root element type declaration of the DTD being the root of the DAG. The edges of the DAG can be considered as denoting an ancestral relationship. For example, in the following DTD

```
<!ELEMENT A (B, C)>
```

<!ELEMENT B ...>

<!ELEMENT C ...>

element type definition A can be considered an ancestor (or parent) of a sequence that is a parent of ename B and ename C. Then ename B and ename C can be considered ancestors of element type definition B and element type definition C, respectively. The ancestral relationship among DTD constructs can be formally defined based on the parent relationship defined as follows:

1. An element type declaration is the parent construct of its content specification.
2. An attribute list declaration is the parent construct of each of its attribute type declarations.
3. For every DTD construct C_1 that is a sub-expression of a content specification, the smallest super-expression of C_1 that is a DTD construct is its parent.
4. An element name that appears in a content specification is a parent construct of the element type declaration with the same element name. The element type declaration is considered the parent construct of any attribute list declaration with the same element name.

The transitive closure of the parent relationship is the ancestral relationship. The reverse relationship of the ancestral relationship is the descendant relationship.

The ancestral relationships so defined do not always form a DAG. For example, the ancestral relationship in the following DTD contains a cycle:

```
<!ELEMENT A (#PCDATA|A)*>
```

5 When cycles occur in the ancestral relationship, every DTD construct in the cycle becomes the ancestor of every other DTD construct in the cycle. However, the concept of traversing the relationship graph in either the ancestor or descendant direction remains useful.

10 Some DTD constructs may have more than one parent. As a result, a single DTD construct may represent XML fragments in different contexts in the document instances. For example, in the following DTD

```
<!ELEMENT A (B, C)>
```

15 <!ELEMENT B (D)>

```
<!ELEMENT C (D)>
```

```
<!ELEMENT D (#PCDATA)>
```

the element type definition D has two parents, one being the element name D in <!ELEMENT B (D)>, the other that in
20 <!ELEMENT C (D)>. A document conforming to the above DTD follows:

```
<A>
```

```
<B><D>first</D></B>
```

```
<C><D>second</D></C>
```


In the document, the element type definition of D corresponds to two elements with the same tag D, but in different contexts, one being the child of element B, the other that of C.

To discuss the different roles played by the same DTD construct, the context of a DTD construct C will be defined to be a unique path from the root construct of a DTD to C in the descendent direction. Where there is a loop in the DTD, there can be an infinite number of contexts for some elements.

Using these concepts, the relationship between binding variables and function parameters is defined as follows: Given a value or binding function associated with a DTD construct in a certain context, a parameter x of the function gets its value from the value bound to the binding variable with the same name, if any, in the binding specification closest to it in context. If such a binding variable does not exist, x is an input parameter of the DTDSA.

The DTDSA for the previous DTD will be:

```
1: <!ELEMENT A (B, C) ::x:=i1 ::y:=i2>
2: <!ELEMENT B (D) ::y:=x+10>
3: <!ELEMENT C (D) ::x:=x+20>
```

4: <!ELEMENT D (#PCDATA :x+y)>

The virtual XML document represented by this DTDSA with input parameters of i1=1 and i2=2 can be derived as follows. Initially at line 1, x and y have the values of 1 and 2, respectively. y is redefined to 11 at line 2, while x is redefined to 21 at line 3. the #PCDATA at line 4 has two contexts. In the context of A-B-D, x gets the value of 1, and y gets the value of 11, and the value of #PCDATA is thus 12. In the context of A-C-D, x is redefined to 21 while y remains at 2, and the value of #PCDATA is 23. The whole corresponding XML document is thus

```
<A>
  <B><D>12</D></B>
  <C><D>23</D></C>
</A>
```

Determining the number of repetitions

Let DC denote a DTD construct, x a variable, and vf a list-valued function producing a list of k values {v1, v2, ... vk}. The DTD construct with an associated binding specification (DC)*::x:=vf, can be considered as equivalent to the sequence DC::x:=v1, DC ::x:=v2, DC ::x:=vk).

Formally, given a DTD construct with an associated binding specification $(DC)\#::x:=cf$, where $\#$ is some repetition symbol, the DTD construct is considered equivalent to one of the following, depending on which repetition symbol $\#$ is:

1. For $\# = *$:

If $k \geq 1$, $(DC)^*$ is equivalent to k consecutive copies of DC . That is, $(DC)^* ::x:=vf \equiv (DC ::x:=v1, DC ::x:=v2, \dots, DC ::x:=vk)$. If $k=0$ (i.e. vf evaluates to an empty list), $(DC)^*$ is equivalent to an empty string.

2 For $\# = +$:

If $k \geq 1$, $(DC)^+$ is equivalent to k consecutive copies of DC -- that is, $(DC)^+ ::x:=vf \equiv (DC ::x:=v1, DC ::x:=v2, \dots, DC ::x:=vk)$. If $K=0$, $(DC)^+$ is equivalent to one copy of DC with x given an undefined value, i.e., $(DC)^+ ::x:=vf \equiv (DC ::x:=undefined)$.

3. For $\# = ?$:

if $k \geq 1$, $(DC)?$ is an equivalent to one copy of DC , and all except the first value produced by vf are ignored. That is, $(DC)? ::x:=vf \equiv (DC ::x:=v1)$. If $k=0$, $(DC)?$ is equivalent to an empty string.

In general, when DC repeats more than once, as required by one of the rules, each copy of DC sees a different binding of x. When DC is constrained to appear one (or zero) times, but vf produces a list of more than one value, only the first one (or zero) value is used, and all other values are ignored. On the other hand, in the case where DC is required to appear at least once, but vf produces 0 values, the value of binding variable x is undefined. In actual implementations, a user or system defined default value can be supplied to x.

In these discussions, the symbol "!=" denotes neither equality nor simple assignment. Rather it binds the list of values produced by the binding function one after another to the binding variable. The number of values in the list produced by the binding function, together with the above rules, determines the number of times the DTD construct preceding the repetition symbol repeats XML document instances.

Consider the following DTDSA:

```
<!ELEMENT A (B, C) ::x:=i1 ::y:=i2>
<!ELEMENT B (#PCDATA :y)>
<!ELEMENT C (D)* ::z:=intseq(x)>
<!ELEMENT D (#PCDATA) :z>
```

where the function intseq(x) produces a sequence of integers from 1 up to x. The virtual XML document corresponding to the DTDSA with i1=3 and i2=5 is

```
5      <A>
      <B> 5 </B>
      <C> <D>1</D> <D>2</D> <D>3</D> </C>
      </A>
```

10 Some general comments

15 The preferred mapping language has the advantage that it can be used to map a wide variety of underlying scheme types, not just relational databases. However, in the following, an illustrative example will be presented which does use a relational database.

20 The preferred mapping language also allows data from multiple sources to be mapped into one single XML document. These multiple sources can be different data containers from different types of data systems. However, in the illustrative example that follows, the sources are various tables from a relational database.

The mapping language has the advantage that it only has to be done once per DTD (or per XML schema). Mapping XML documents one by one would be less efficient.

5

ESTABLISHING A MAPPING

The procedures for establishing a mapping between a given DTD and the underlying data sources include performing the following three parts, where their exact order of execution is immaterial:

Given a DTD,

1. For each DTD construct that ends with a repetition symbol:

- a. Identify a list of data objects, a formula that will identify a list of data objects, or a parameterized formula that will identify a list of data objects when values to the parameters are supplied. For convenience, this will be called the *binding formula*.
- b. Associate the previous list or formula with a variable name. For convenience, this variable name will be called a *binding variable*, and the binding variable and binding formula pair a *binding specification*. After this step, the binding variable can be used in the formula in step 1a for other DTD constructs.
- c. Associate binding specification to the DTD construct.

d. Optionally repeat this process.

2. For each DTD construct that does not end with a repetition symbol and is not a #PCDATA, a choice list or an attribute definition, optionally associate binding specifications with it (i.e. perform the Steps 1a, 1b, 1c, and 1d).

3. For each DTD subexpression that is a #PCDATA, a choice list or an attribute definition:

- a. Choose a value, a formula that produces a piece of text, or a parameterized formula (function) that will produce a piece of text when the values to the parameters are supplied. For convenience, this value or formula is called a *value specification*.
- b. Associate the formula with the DTD subexpression.

Note: Whenever a parameterized formula is used, in either a value specification or a binding specification, each parameter in the formula can either be a binding variable used in a higher level binding specification or otherwise. Whenever a binding variable is chosen in a binding specification, the variable can be a parameter used in a lower level specifications or otherwise. These choices will

affect the contents of XML document extraction, as will be seen later in the XML extraction section.

Alternatively, the above three steps may be performed in any other orders, such as Step 3, Step 1, Step 2, or Step 3, Step 2 or Step 1, etc.

Mapping variation

If the set of underlying data includes XML text segments, the steps in the described method are modified as follows:

1'.For each DTD construct with an ending repetition symbol:

a.Associate binding specification or an XML valued value specification with the DTD construct.

b.Optionally associate more binding specifications to the DTD construct.

2'.For each DTD construct that does not end with a repetition symbol and is not a #PCDATA or an attribute definition,

a.Optionally associate binding specification or an XML valued value specification with the DTD construct.

b.Optionally associate more binding specifications to the DTD construct.

3'.For each DTD construct that is a #PCDATA or an attribute definition, associate a non XML-valued value specification with the DTD construct.

4'.For each choice list DTD construct, associate an XML-valued or non-XML valued value specification with the construct.

FIG. 6A shows an overview of a method for establishing mapping in DTDSA format according to the present invention. At 605', a DTD instance 610' is received, and generates a DTDSA 615' based on some user options 612'.

Fig. 6b shows an internal flow diagram of block 605'. Initially the DTD 610' is parsed into some internal format, e.g., a directed acyclic graph, which is easy to manipulate, as shown in block 620'. Several traversals are performed to annotate DTD constructs, which are represented as nodes in the graph, using value or binding specifications, as shown in block 630'. The order of operations shown in fig. 630' is optional. Any order may be chosen. All the three listed items may include acceptance of user options or inputs for variable names, formula/function selections.

In item 1. of block 630', every #PCDATA, choice list, or attribute definition is visited. These are annotated first with a value specification by choosing variable names and formula/function. In item 2., nodes representing DTD constructs that end with a repetition symbol ("*", "+", "?") are annotated next with binding specifications, by choosing binding variables, parameter variables, and formula/function. For all the other nodes, the binding specification annotation is optional, as shown in item 3. During item 2 and item 3, the binding variables stay related to certain parameters based on user options or inputs, as shown in item 4.

Formatting the DTD graph with annotations, as shown in block 640', is the next stage for preparation of the result DTDSA. A simple recursive technique can traverse the DTD graph to identify the constructs visited, and at the same time, in item 1. insert the graph in the original DTD text format. In accordance with item 2., during the traversal, any annotations associated with a node are found, the value or binding specifications are printed, immediately following the text of the DTD construct that corresponds to the node. Value specifications are inserted with a prefix ":", and binding specifications are inserted with a prefix "::". Also, for any binding specification, the binding variable is

inserted first, followed by ":", and then the binding
formula or function.

5

Generating XML documents based on the mapping

Now the description will proceed from a discussion of
the nature of the mapping and how it is generated to a
discussion of how the mapping is used to generate XML
documents.

When a mapping between DTD and the data sources has
been established, using the DTDSA technique described above,
XML documents can be created by

- (1) using the DTD as a template for building the XML
documents and
- (2) supplying values to the parameters in the various
specifications we associated with DTD constructs and
then using these specifications as the construction
instructions.

In the preferred embodiment, values are assigned to the
parameters used in the various specifications which are not
also binding variables. Then starting from the root DTD
element, each DTD element is recursively instantiated into

at least one XML element. In the instantiation process,
value specifications are used

(1) to determine the value to be assigned to each #PCDATA
or attribute definition, and

5 (2) to determine which child to instantiate in a choice
list.

The binding specifications are used

(1) to determine how many instances a child DTD construct
should be instantiated into when the DTD construct ends
10 with a repetition symbol, and

(2) to associate values with parameters in the
specifications useful in instantiating descendant DTD
constructs.

15 More specifically, rules are recursively defined for
instantiating individual DTD constructs when all the needed
parameters (for their corresponding binding or value
specifications) are known. The method for generating XML
documents based on the mapping is simply as follows:

- 20
1. Read the DTD, the mapping, and input values.
 2. Prepare input values for the parameters defined in the
last (tail) binding specification of the DTD root
element ED, and make a set of variable/value pairs

called the "environment", Env_0 . For every DTD element there will be a different environment Env_i .

3. Starting from the root element,

a. Using the incoming Env_i , instantiate every DTD

construct (including the root ED) in some tree traversal, for example a breadth first search (BFS) traversal order. In other words, use a first-in-first-out queue to collect all the subexpressions that need to be instantiated after applying the instantiating rules to the current DTD construct.

b. For an ED or AD with nested binding specifications (with a potential inner most value specification), resolving the binding specifications from the tail (outer most) working towards the head (inner most), please see the section on the tail absorbing rule, below. This step resolves and moves all but the head binding specification into Env_i .

c. Env may be modified during steps 3.b and 3.c, pass along the new Env to all children of the current DTD construct.

4. Follow step 3 to obtain a result XML document.

Definitions used in the creation of XML documents

A. An environment *Env* is a set of bindings, e.g., $\{x=1, y=2, z=5\}$.

5. B. Suppose *bspec* is a binding specification. $Bnd(bspec, n, env)$ denotes the *n*th binding specified by *bspec*, under the environment *Env*.

10 C. $Eval(E, Env)$ denotes the function that evaluates the algebraic expression *E* using bindings in the environment *Env*. If a parameter in *E* is not in *Env*, $Eval()$ will prompt user to input a value. For example, $Eval(x+1, \{x=1\}) = 2$, $Eval("XM"+x, \{x="L"\}) = "XML"$, and $Eval(y+3, \{z=1\})$, in which case $Eval()$ will prompt user to input a value for *y*.

15 D. $Ival(C, Env)$ is the function of instantiating any DTD construct *C* using the bindings in *Env*.

20 The tail absorbing rule for resolving nested binding specifications

Suppose DTD construct *C* has nested binding specifications, $bspec_1, bspec_2, \dots, bspec_n$, with incoming bindings

specified in Env_n . The rule absorbs all but the first (inner most) binding specifications.

$Ival(C+bspec_1+\dots+bspec_n, Env_n)$

$$\begin{aligned} 5 \quad &= Ival(C+bspec_1+\dots+bspec_{n-1}, Env_{n-1}) \\ &= \dots \\ &= Ival(C+bspec_1, Env_1), \end{aligned}$$

where $Env_i = Env_{i+1} + Bnd(bspec_{i+1}, 1, Env_{i+1})$,

10 $for\ i=n-1, n-2, \dots, 1.$

The instantiation rules for individual DTD construct:

For ease of presenting, the terms in capital letters are DTD constructs, and the same terms in small letters denote instances of corresponding DTD construct. For example, **ED** denotes the element type definition construct, and *ed* is an instance of **ED**.

ED and **AD** with binding specification *bspec*:

$$\begin{aligned} 20 \quad &Ival(ed+bspec, Env) = Ival(ed, Env+Bnd(bspec, 1, Env)) \\ &Ival(ad+bspec, Env) = Ival(ad, Env+Bnd(bspec, 1, Env)) \end{aligned}$$

ED: assume ad_1, ad_2, \dots, ad_i are ADs associated with this ED, i.e., ed , and CS is the content-spec of ed . Also, let $TagEd$ be the **ENAME** of ed .

$Ival(ed, Env) = \text{"<TagEd"} + Ival(ad_1, Env) + Ival(ad_2, Env) + \dots$

5 $\quad \quad \quad + Ival(ad_i, Env) + \text{">"}, \quad \quad \quad \text{if } CS \text{ is EMPTY}$

or $\text{"<TagEd"} + Ival(ad_1, Env) + Ival(ad_2, Env) + \dots + Ival(ad_i, Env) + \text{">"}$

$\quad \quad \quad + Ival(CS, Env) + \text{"</TagEd>"}, \quad \quad \quad \text{otherwise}$

CP: assume the content particle cp has a single binding specification $bspec$, with k bindings.

10 •If $cp = cu + \text{"*"} + bspec$,

$Ival(cp, Env) = Ival(cu, Env + Bnd(bspec, 1, Env))$

$\quad \quad \quad + Ival(cu, Env + Bnd(bspec, 2, Env))$

$\quad \quad \quad + \dots + Ival(cu, Env + Bnd(bspec, k, Env)), \quad \quad \quad \text{if } k > 0$

$\quad \quad \quad = \text{""}, \quad \quad \quad \text{if } k = 0$

15 •If $cp = cu + \text{"+"} + bspec$,

$Ival(cp, Env) = Ival(cu, Env + Bnd(bspec, 1, Env))$

$\quad \quad \quad + Ival(cu, Env + Bnd(bspec, 2, Env))$

$\quad \quad \quad + \dots + Ival(cu, Env + Bnd(bspec, k, Env)), \quad \quad \quad \text{if } k > 0$

$\quad \quad \quad = \text{user provided default value}, \quad \quad \quad \text{if } k = 0$

20 •If $cp = cu + \text{"?"} + bspec$,

$Ival(cp, Env) = Ival(cu, Env + Bnd(bspec, 1, Env)), \quad \quad \quad \text{if } k > 0$

$\quad \quad \quad = \text{""}, \quad \quad \quad \text{if } k = 0$

CU: assume the content unit *cu* has a single binding specification *bspec*. Let *clist* denote an instance of choice list or terminal choice list constructs.

5 •If $cu = clist + bspec$,

$Ival(cu, Env) = Ival(Alt_k, Env)$, where Alt_k is the k th alternative of *clist*.

•If $cu = seq + bspec$,

$Ival(cu, Env) = Ival(seq, Env+Bnd(bspec,1,Env))$

10 •If $cu = ename + bspec$,

$Ival(cu, Env) = Ival(ed, Env+Bnd(bspec,1,Env))$, where *ed* is the ED that defines *ename*.

SEQ: assume *seq* is a sequence of k CPs, i.e., $seq = (cp_1, cp_2, \dots, cp_k)$.

$Ival(seq, Env) = Ival(cp_1, Env) + Ival(cp_2, Env) + \dots + Ival(cp_k, Env)$

PCDATA: assume *pcdata* (of #PCDATA construct) has a value specification *vspec*.

$Ival(pcdata+ vspec, Env) = Eval(vspec, Env)$.

AD: assume the attribute list declaration *ad* has *k* ATDs,
with *atd_i* as its *i*th attribute definition, and *ename_i* is the
attribute name of *atd_i*.

$$\begin{aligned} Ival(ad, Env) = & ename_1 + "=" + Ival(atd_1, Env) + " " \\ & + ename_2 + "=" + Ival(atd_2, Env) + \\ & " " + \dots + ename_k + "=" + \\ & Ival(atd_k, Env) \end{aligned}$$

ATD: assume *atd* (of ATD construct) has a value specification
vspec.

$$\begin{aligned} Ival(atd, Env) = & Alt_i, Eval(vspec, Env) = I, && \text{if } atd \text{ is an enumerated type,} \\ & = Eval(vspec, Env), && \text{otherwise} \end{aligned}$$

Extract variation:

If the mapping is established using the scheme labeled
Mapping variation, we use a variation of the extract scheme
to generate XML value from the mapping. The extract
variation consists of all the above extraction steps, plus
one addition rule:

Assign XML-text-block: assume *cnstr* is a DTD construct with
a value spec *vspec* which identifies or produces an XML text
segment.

$Ival(cnstr + vspec) = Eval(vspec, Env)$

We can optionally validate whether the value produced by

$Eval(vspec, Env)$ conforms with the DTD in question.

5

Figs. 7a & b show block diagrams for the XML composition algorithm using DTDSA according to the present invention.

10

In Fig. 7a, a document retrieval and composition algorithm 705 receives input parameter name and value pairs 710, e.g., $\langle A=1, B=100 \rangle$, and generates a return XML document 715 based on the provided DTDSA 712.

15

An internal flow diagram of the algorithm 705 is shown in Fig. 7b. Initially, the algorithm parses the DTDSA 712 into some internal format, e.g., a directed acyclic graph, which is easy to manipulate, and prepares the input parameters into environmental variables as depicted in block 720. The algorithm then performs a breadth first search (BFS) traversal on the internal DTDSA structure, using a first-in-first-out queue to keep track of the set of structure nodes visited. The BFS traversal includes a standard procedure which needs to set up initial values (the document root and initial environmental variables) for the queue at 725, repeats fetching the queue until the queue is

20

empty at 730, and for every node and environmental variables
fetched at 735, performs suitable operations at 740 to
generate partial XML components and adds all the children
nodes and new environmental variables/values to the queue
5 745. As shown in block 740, the operations for a visited
node, denoting a data type or attribute type, include

- (1) resolving unbound variables, which are associated
with the data type or attribute, and defined in binding
or value specifications in the DTDSA, using the fetched
10 environmental variables/values; (The resolution of
unbound variables may involve accessing data sources
and predefined function calculation.)
- (2) generating partial XML components based on current
DTDSA node name (ENAME) as the tag, and the resolved
15 content as the value or attribute;
- (3) adding the newly created variable/value pairs into
the environmental variables.

FIG. 8a shows the type of directed acyclic graph
20 generated in item 712. A data composition flow is shown
over the DTDSA directed graphical structure. A data type is
denoted by a circle node as depicted in 835, and terminal
#PCDATA by oval shaped node 840. The dotted line across
directed edges denotes choice list for children nodes at

825, and an edge marked with a "*" at 820 denotes a repeatable and optional child data type in the document. The initial environmental variables/values 805, ENV_0 , is operated on the document root 835, which has an associated binding specification $D:=f(A)$ 810, a function that depends on environmental variable A 808 and produces a value for the environmental variable D . The resolved D variable/value pair as shown in 815 is added into environmental variables/values, ENV_2 as shown in 812, and passed along to child node. Not shown in the figure, the choice list as illustrated in 825 should have an associated binding specification whose resolution can lead to finding the child from the choice list to visit next. The flow will reach the leaf nodes, such as #PCDATA node shown in 840, and CDATA node for attribute definition not shown in the figure. The leaf nodes have associated value specifications, e.g., $g(D)$ as shown in 830, which can be resolved using the incoming environmental variable/value pairs.

FIG. 9 shows a directed acyclic graph, like Fig. 8, but specifically related to the example of figures 3a, 3b, and 5. An illustrative example is shown for a partial resolution sequence when an input value 100 is assigned to variable x as shown in 800 based on the algorithm as shown

in Figs. 7a & b, the DTDSA as shown in FIG. 5, and relational schema as shown in FIG. 3a. A sequence of resolutions occurs based on the BFS traversal order. The resolutions at numerals 905, 910, 915, 920, 925, 935, and 945 correspond to the binding/value specs at numerals 505, 510, 515, 520, 525, 535, and 545 respectively. The resolution for the binding spec at numeral 510 using $x=100$ involves table *PO* access with *poid=100* and derives into a record $\langle 100, 20, 10 \rangle$ for *r* as shown in 910. The binding spec in 505 uses the record *r* to derive its third argument, *PO.poid(r)*, to 100, which is needed to resolution of *w*, i.e., *row(lineitem, poid, 100)*. Since there are two records in table *lineitem* with *POID=100*, as shown by numerals 330 and 335 in FIG. 3a, *w* is assigned the two records as shown at numeral 905. Such binding can be used to derive multiple occurrence of a data type along the edge marked with "*" or "+" as shown at numeral 902. The two records for variable *w* can be used to derive two XML components *lineitem* as shown at numeral 925. Attribute values with value spec can also be similarly derived. For example, as shown at numeral 920, the attribute *name* with a "@" prefix of data type *buyer* can have a resolved value *s* from deriving the binding spec at numeral 535 using *r* as shown at numeral 935.

Fig. 10 shows the retrieved XML document for the example depicted in FIGS. 3a, 3b, 5, and 9. Based on the input $x=100$, the document is a PO with id 100. There are two line items retrieved and composed as shown at numerals 1010 and 1015. Attributes are also illustrated as shown at numerals 1005 and 1010.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the design and use of data conversion techniques and XML and which may be used instead of or in addition to features already described herein. Although claims have been formulated in this application to particular combinations of features, it should be understood that the scope of the disclosure of the present application also includes any novel feature or novel combination of features disclosed herein either explicitly or implicitly or any generalization thereof, whether or not it mitigates any or all of the same technical problems as does the present invention. The applicants hereby give notice that new claims may be formulated to such features during the prosecution of the present application or any further application derived therefrom.

We claim:

1. A computer method, comprising executing at least the following operation in at least one data processing device:
5 establishing a mapping from lists and scalars corresponding to at least one data source into XML elements and attributes.

10 2. At least one medium readable by a data processing device and embodying at least one result of the method of claim 1.

3. A data processing device comprising:

- the at least one medium according to claim 2, and
- at least one processor configured to use the at least
15 one medium to produce an XML document based on the mapping.

20 4. The method of claim 1, wherein the at least one data source comprises at least two data sources, and the data sources are of different types.

5. At least one medium readable by a data processor and embodying at least one result of the method of claim 4.

6. A data processing device comprising:

- the at least one medium according to claim 5; and
- at least one processor configured to use the at least one medium to produce an XML document based on the mapping.

7. The method of claim 1, wherein the data source is a relational database.

8. At least one medium readable by a data processing device and embodying at least one result of the method of claim 7.

9. A data processing device comprising

- the at least one medium according to claim 8; and
- at least one processor configured to use the at least one medium to produce an XML document based on the mapping.

10. The method of claim 1, further comprising executing the following operation in the data processing device:
expressing the mapping in constructs of a mapping language.

11. At least one medium readable by a data processing device and embodying at least one result of the method of claim 10.

5 12. A data processing device comprising

- the at least one medium according to claim 11; and
- at least one processor configured to use the at least one medium to produce an XML document based on the mapping.

10 13. The method of claim 10, further comprising executing the following operation in the data processing device: inserting the constructs into a DTD to create an annotated DTD.

15 14. At least one medium readable by a data processing device and embodying at least one result of the method of claim 13.

15. A data processing device comprising:

- 20
- the at least one medium according to claim 14; and
 - at least one processor configured to
 - use the at least one medium to produce an XML document based on the mapping; and
 - perform the inserting operation.

16. The method of claim 13, wherein the constructs comprise at least one of a value specification and a binding specifications.

5

17. At least one medium readable by a data processing device and embodying at least one result of the method of claim 16.

10

18. A data processing device comprising:

- the at least one medium according to claim 17; and
- at least one processor configured to use the at least one medium to produce an XML document based on the mapping.

15

19. The method of claim 13, wherein

- at least one of the constructs comprises at least one parameter;
- the at least one of the constructs is adapted so that a value of the at least one of the parameters is determinable at a time of generation of at least one respective XML element associated with the at least one of the constructs.

20

20. At least one medium readable by a data processing device and embodying at least one result of the method of claim 19.

5 21. A data processing device comprising:

- the at least one medium according to claim 20; and
- at least one processor configured to
 - use the at least one medium to produce an XML document based on the mapping; and
 - pass the value to the parameter.

10 22. The method of claim 1, further comprising executing the following operation in the data processing device:
associating values and or formulas with a DTD.

15 23. At least one medium readable by a data processing device and embodying at least one result of the method of claim 22.

20 24. A data processing device comprising:

- the at least one medium according to claim 23; and
- at least one processor configured to
 - use the at least one medium to produce an XML document based on the mapping; and

- perform the associating operation.

25. The method of claim 22, wherein the associating includes associating one or more lists of data objects or formulas producing data objects with each DTD construct having a repetition symbol at the end.

26. At least one medium readable by a data processing device and embodying at least one result of the method of claim 25.

27. A data processing device comprising:

- at least one medium according to claim 26; and
- at least one processor configured to
 - use the at least one medium to produce an XML document; and
 - perform the associating operation.

28. The method of claim 22, wherein the associating includes associating one or more lists of data objects or formulas producing data objects with each DTD construct which is not a #PCDATA, a choice list, or an attribute list, and does not end with a repetition symbol.

29. At least one medium readable by a data processing device
and embodying at least one result of the method of
claim 28.

5 30. A data processing device comprising:

- the at least one medium according to claim 30; and
- at least one processor configured to
 - use the at least one medium to produce an XML
document based on the mapping; and
- 10 - perform the associating operation.

31. The method of claim 22, wherein associating includes
associating a value or formula producing a value with each
PCDATA, choice list, or attribute definition.

15 32. At least one medium readable by a data processing device
and embodying at least one result of the method of
claim 31.

20 33. A data processing device comprising:

- the at least one medium according to claim 32; and
- at least one processor configured to
 - use the at least one medium to produce an XML
document; and

- perform the associating operation.

34. The method of claim 22, wherein associating includes, not necessarily in the following order:

- first associating one or more lists of data objects or formulas producing data objects with a DTD construct;
- second associating at least one of the lists or formulas with at least one variable name; and
- using the variable name as a parameter in at least one other formula.

35. At least one medium readable by a data processing device and embodying at least one result of the method of claim 34.

36. A data processing device comprising:

- the at least one medium according to claim 35; and
- at least one processor configured to
 - use the at least one medium to produce an XML document; and
 - perform the associating operation and included operations.

37. The method of claim 1, further comprising executing the following operation in the data processing device:
associating at least one respective environment with a respective XML element to be generated.

5

38. At least one medium readable by a data processing device and embodying at least one result of the method of claim 37.

10

39. A data processing device comprising:

- the at least one medium according to claim 38; and
- at least one processor configured to
 - use the at least one medium to produce an XML document; and
- perform the associating operation.

15

40. The method of claim 37, wherein the at least one environment comprises

- information from a parent XML element of the respective XML element; and
- information from a binding specification of a DTD construct associated with the respective XML element.

20

41. At least one medium readable by a data processing device
and embodying at least one result of the method of
claim 40.

5 42. A data processing device comprising:

- the at least one medium according to claim 41; and
- at least one processor configured to
 - use the at least one medium to produce an XML
document; and
 - 10 - perform the associating operation.

43. The method of claim 37, wherein

- the mapping includes at least one respective
specification corresponding to at least one respective
15 XML element;
- the specification comprises at least one parameter for
receiving a value upon generation of an XML document; and
- the method further comprises, upon generation of an XML
document, sending the at least one parameter a value
20 according to at least one variable/value pair in the at
least one respective environment.

44. At least one medium readable by a data processing device and embodying at least one result of the method of claim 43.

5 45. A data processing device comprising:

- the at least one medium according to claim 44; and
- at least one processor configured to
 - use the at least one medium to produce an XML document; and
- 10 - perform the associating and sending operations.

46. At least one medium readable by at least one data processing device and embodying software adapted to perform operations comprising: establishing a mapping from lists and
15 scalars corresponding to at least one data source into XML elements and attributes.

47. The at least one medium of claim 46, wherein the at least one data source comprises at least two data sources,
20 and the data sources are of different types.

48. The at least one medium of claim 46, wherein the data source is a relational database.

49. The at least one medium of claim 46, further comprising executing the following operation in the data processing device: expressing the mapping in constructs of a mapping language.

5

50. The at least one medium of claim 46, further comprising executing the following operation in the data processing device: inserting the constructs into a DTD to create an annotated DTD.

10

51. The at least one medium of claim 50, wherein the constructs comprise at least one of a value specification and a binding specifications.

15

52. The at least one medium of claim 50, wherein

- at least one of the constructs comprises at least one parameter; and
- the at least one of the constructs is adapted so that a value of the at least one of the parameters is determinable at a time of generation of at least one respective XML element associated with the at least one of the constructs.

20

53. The at least one medium of claim 46, wherein the operations further comprise associating values and or formulas with a DTD.

5 54. The at least one medium of claim 46, wherein the associating includes associating one or more lists of data objects or formulas producing data objects with each DTD construct having a repetition symbol at the end.

10 55. The at least one medium of claim 54, wherein the associating includes associating one or more lists of data objects or formulas producing data objects with each DTD construct which is not a #PCDATA, a choice list, or an attribute list, and does not end with a repetition symbol.

15 56. The at least one medium of claim 54, wherein associating includes associating a value or formula producing a value with each PCDATA, choice list, or attribute definition.

20 57. The at least one medium of claim 54, wherein associating includes, not necessarily in the following order:

- first associating one or more lists of data objects or formulas producing data objects with a DTD construct;

- second associating at least one of the lists or formulas with at least one variable name; and
- using the variable name as a parameter in at least one other formula.

5

58. The at least one medium of claim 46, wherein the operations further comprise associating at least one respective environment with a respective XML element to be generated.

10

59. The at least one medium of claim 58, wherein the at least one environment comprises

- information from a parent XML element of the respective XML element; and
- information from a binding specification of a DTD construct associated with the respective XML element.

15

60. The at least one medium of claim 58, wherein

- the mapping includes at least one respective specification corresponding to at least one respective XML element;
- the specification comprises at least one parameter for receiving a value upon generation of an XML document; and

20

- the method further comprises, upon generation of an XML document, sending the at least one parameter a value according to at least one variable/value pair in the at least one respective environment.

5

61. At least one data processing device comprising:

- means for receiving data from at least one data source;
- at least one processor adapted to perform operations comprising: establishing a mapping from lists and scalars corresponding to the data into XML elements and attributes.

10

62. The at least one data processing device of claim 61, wherein the at least one data source comprises at least two data sources, and the data sources are of different types.

15

63. The at least data processing device of claim 62, wherein the data source is a relational database.

20

64. The at least one data processing device of claim 61, further comprising executing the following operation in the data processing device: expressing the mapping in constructs of a mapping language.

65. The at least one data processing device of claim 64,
further comprising executing the following operation in the
data processing device: inserting the constructs into a DTD
to create an annotated DTD.

5

66. The at least one data processing device of claim 64,
wherein the constructs comprise at least one of a value
specification and a binding specifications.

10

67. The at least one data processing device of claim 64,
wherein

- at least one of the constructs comprises at least one
parameter; and
- the at least one of the constructs is adapted so that a
value of the at least one of the parameters is
determinable at a time of generation of at least one
respective XML element associated with the at least one
of the constructs.

15

20

68. The at least one data processing device of claim 61,
wherein the operations further comprise associating values
and or formulas with a DTD.

69. The at least one data processing device of claim 68,
wherein the associating includes associating one or more
lists of data objects or formulas producing data objects
with each DTD construct having a repetition symbol at the
end.

70. The at least one data processing device of claim 68,
wherein the associating includes associating one or more
lists of data objects or formulas producing data objects
with each DTD construct which is not a #PCDATA, a choice
list, or an attribute list, and does not end with a
repetition symbol.

71. The at least one data processing device of claim 68,
wherein the associating includes associating a value or
formula producing a value with each PCDATA, choice list, or
attribute definition.

72. The at least one data processing device of claim 68,
wherein the associating includes, not necessarily in the
following order:

- first associating one or more lists of data objects or
formulas producing data objects with a DTD construct;

- second associating at least one of the lists or formulas with at least one variable name; and
- using the variable name as a parameter in at least one other formula.

5

73. The at least one data processing device of claim 61, wherein the operations further comprise associating at least one respective environment with a respective XML element to be generated.

10

74. The at least one data processing device of claim 73, wherein the at least one environment comprises

- information from a parent XML element of the respective XML element; and
- information from a binding specification of a DTD construct associated with the respective XML element.

15

75. The at least one data processing device of claim 73, wherein

20

- the mapping includes at least one respective specification corresponding to at least one respective XML element;

- the specification comprises at least one parameter for receiving a value upon generation of an XML document; and
- the method further comprises, upon generation of an XML document, sending the at least one parameter a value according to at least one variable/value pair in the at least one respective environment.

5

10

ABSTRACT OF THE DISCLOSURE

A mapping language, insertable into a DTD, allows automatic mapping from data sources into XML. A mapping results from the establishment of a correspondence between entities in a data source on the one hand and lists and scalars on the other hand. The language maps the lists and scalars to XML elements and attributes. The mapping language includes two constructs: the binding specification and the value specification. The value specification associates with a value or choice declaration. The binding specification includes at least one variable/expression pair. The constructs are insertable into a DTD to create an annotated DTD.

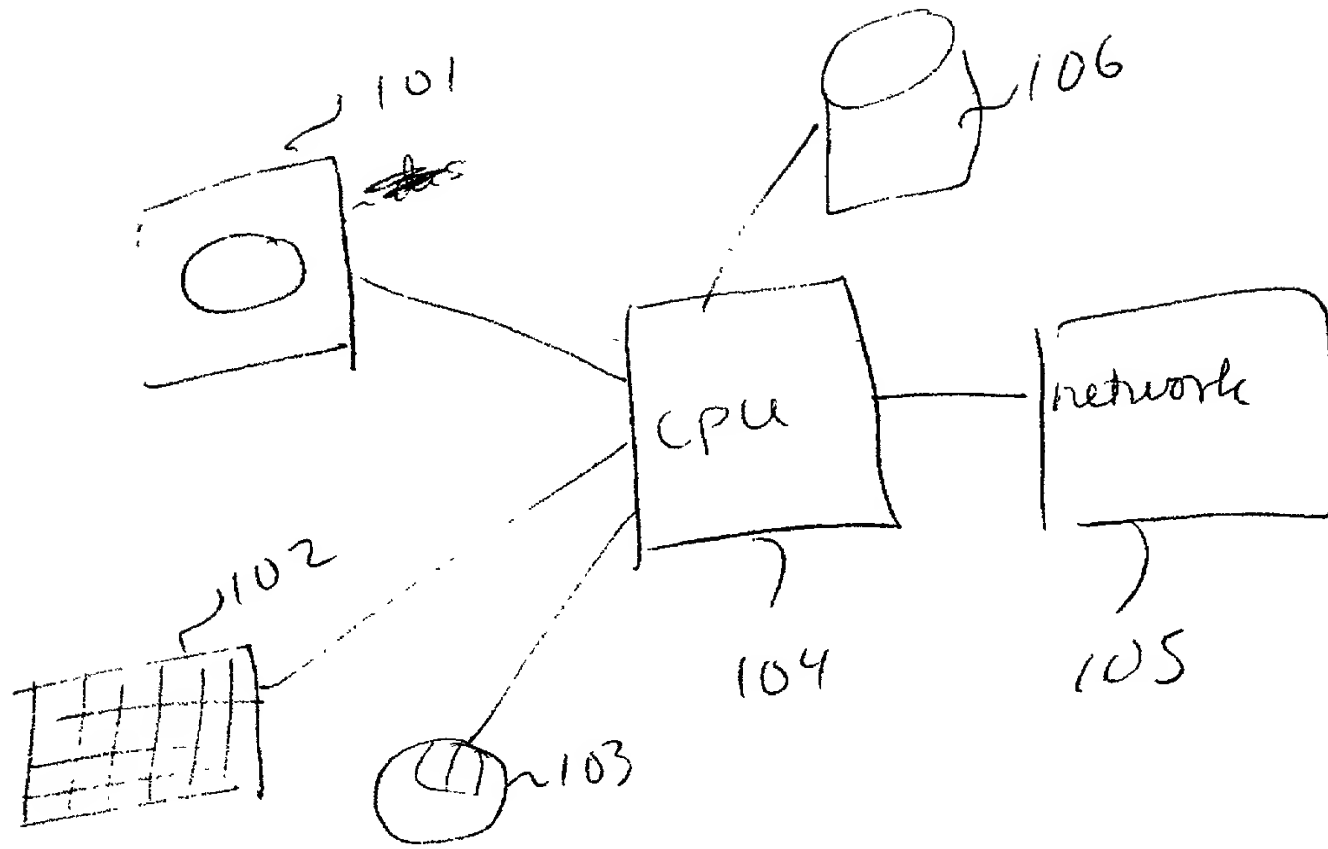
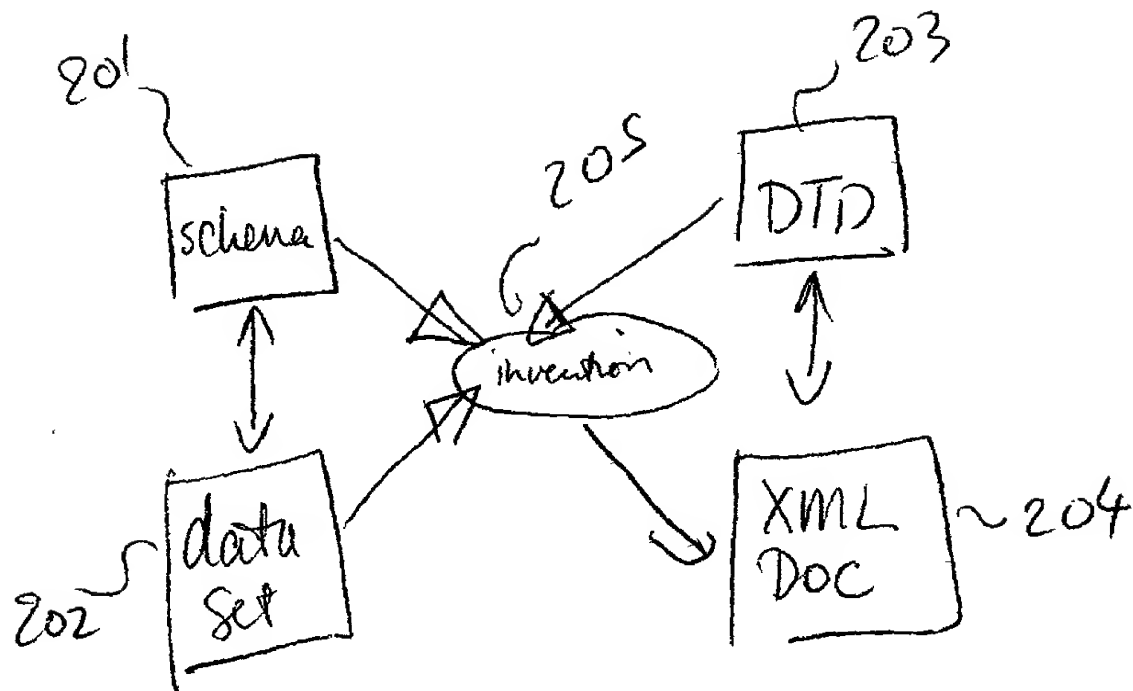


Fig. 1

Fig. 2



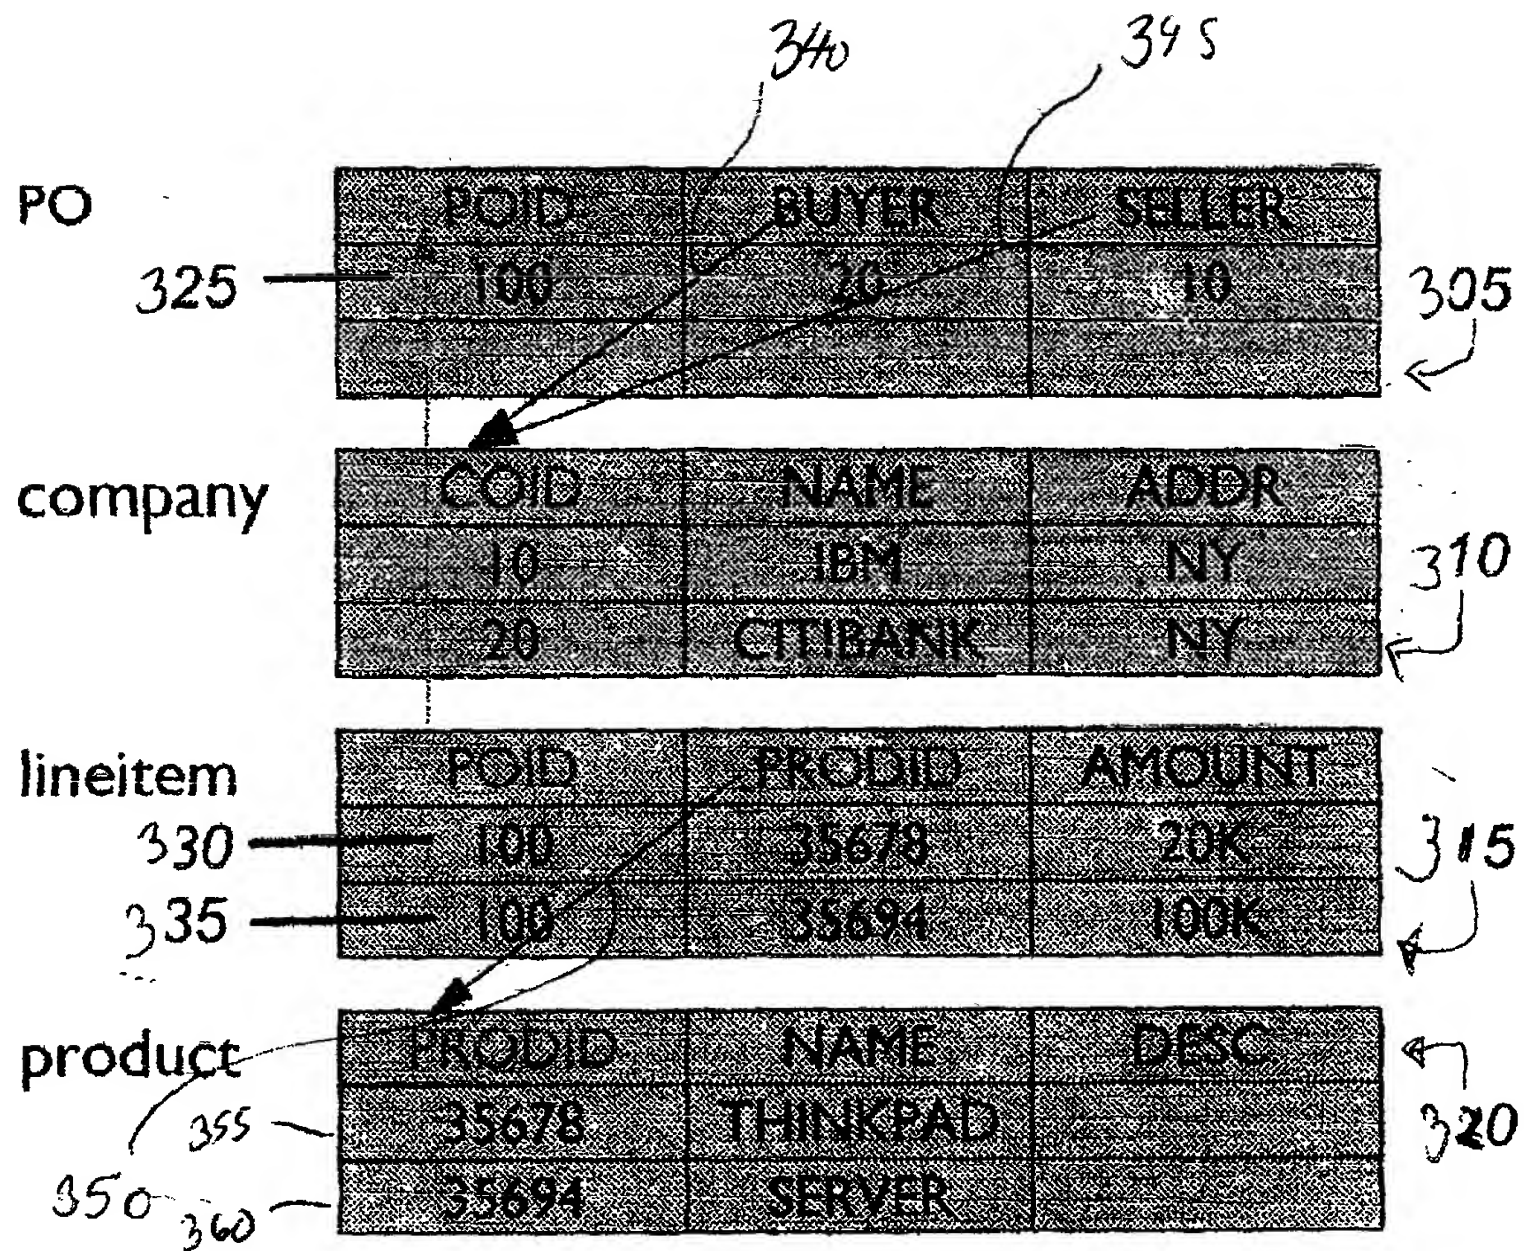


Figure 3a Example purchase order relational schema


```

301 <!DOCTYPE PO [
302 ~<!ELEMENT PO (id, buyer, seller, (lineitem)* )>
303 ~<!ELEMENT id (#PCDATA)>
304 ~<!ELEMENT buyer (address)>
305 ~<!ATTLIST buyer
      name CDATA #REQUIRED >
306 ~<!ELEMENT seller (address)>
307 ~<!ATTLIST seller
      name CDATA #REQUIRED >
308 ~<!ELEMENT address (#PCDATA)>
309 ~<!ELEMENT lineitem (prodname, amount)>
310 ~<!ELEMENT prodname (#PCDATA)>
311 ~<!ELEMENT amount (#PCDATA)>
312 ]>

```


Figure 3b. Example DTD

Fig. 4

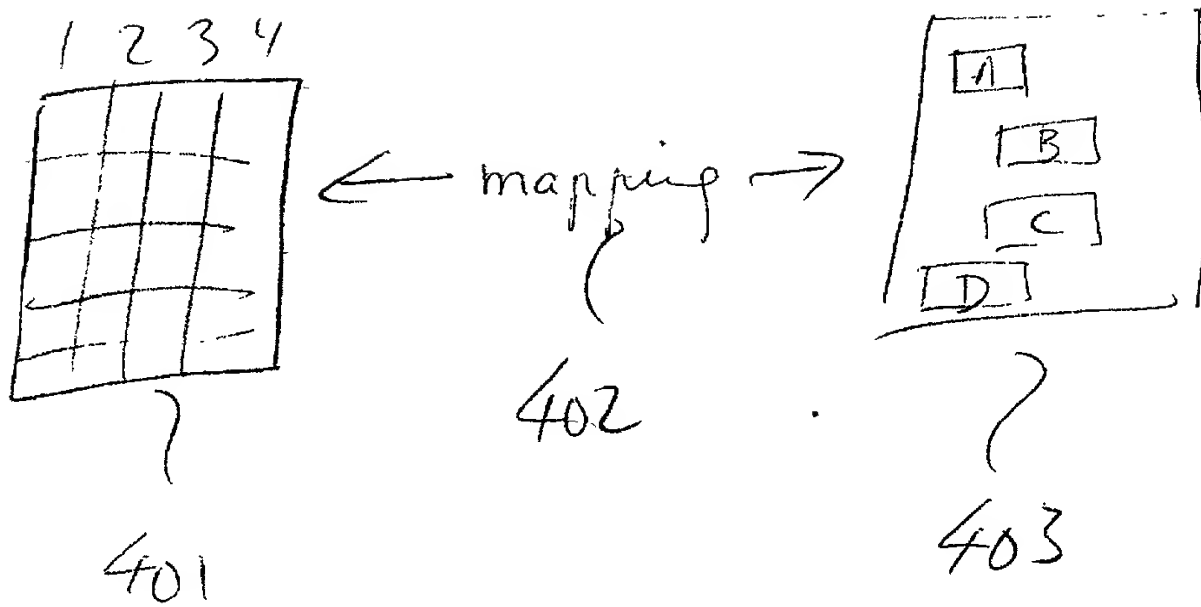

<!DOCTYPE PO [
 <!ELEMENT PO (id, buyer, seller,
 (lineitem)* :: w:= row(lineitem, poid, PO.poid(r)))>
 :: r:=row(PO, poid, x)
 <!ELEMENT id (#PCDATA :PO.poid(r))>
 <!ELEMENT buyer (address)> :: s:= row(company, id, PO.buyer(r))
 <!ATTLIST buyer
 name CDATA #REQUIRED :company.name(s) >
 <!ELEMENT seller (address)> :: s:= row(company, id, PO.seller(r))
 <!ATTLIST seller
 name CDATA #REQUIRED :company.name(s) >
 <!ELEMENT address (#PCDATA :company.address(s))>
 <!ELEMENT lineitem (prodname,
 amount)> :: v:= row(prod, prodid, lineitem.prodid(w))
 <!ELEMENT prodname (#PCDATA :product.prodname(v))>
 <!ELEMENT amount (#PCDATA :lineitem.amount(w))>
]>

Figure 5 Example DTDSA

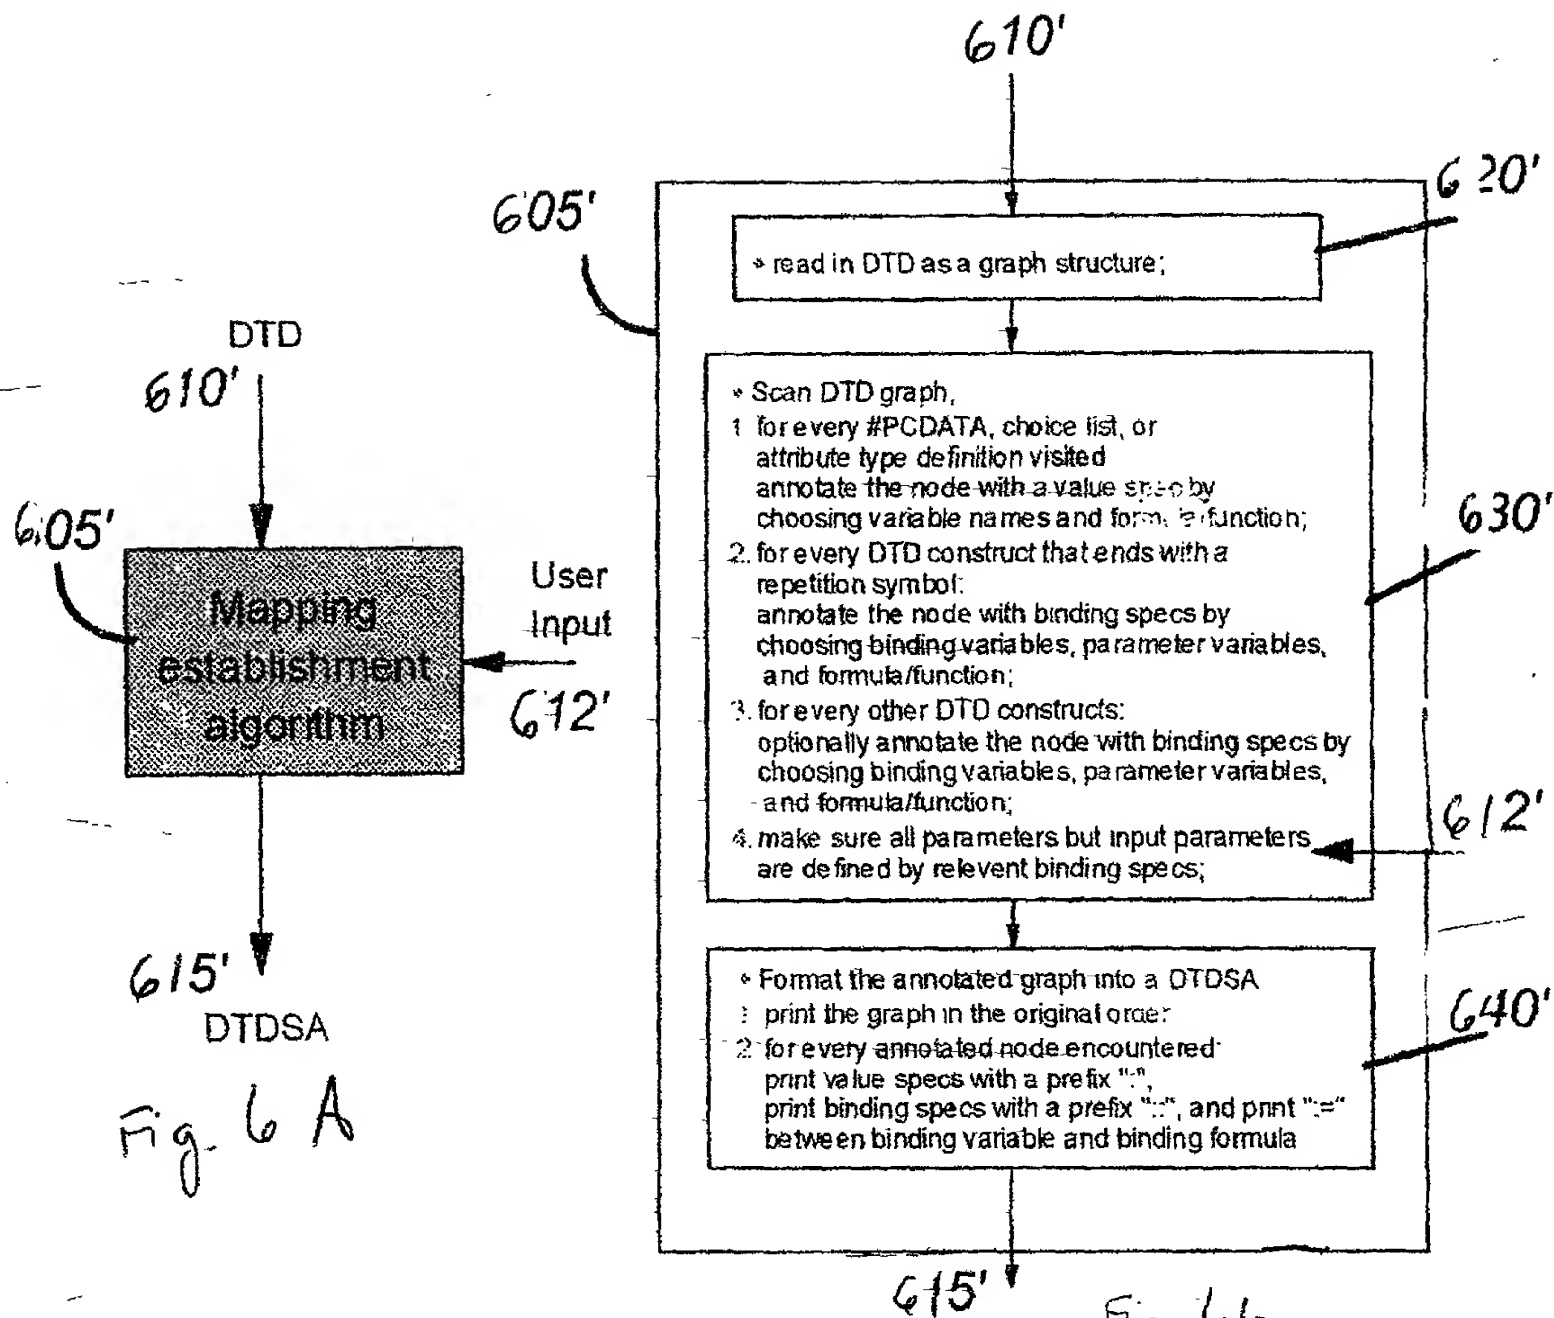

Algorithm for establishing the mapping in DTDSA format

input parameter
pairs

(A=1;B=100) DTDSA


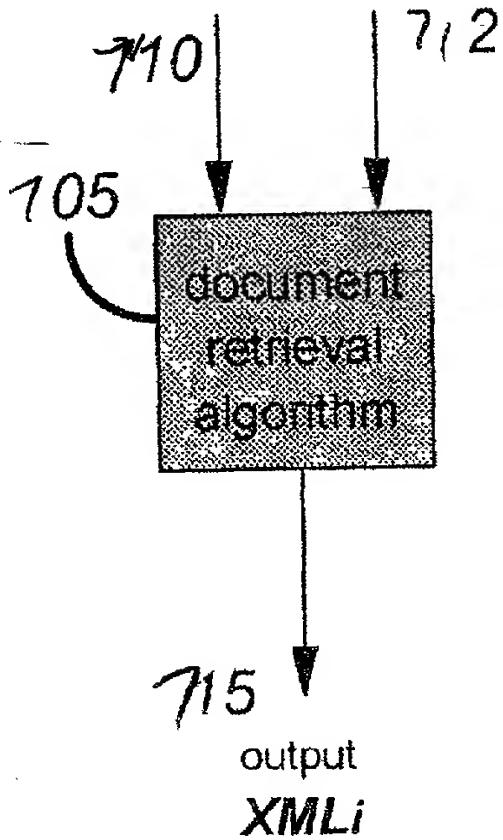


Fig. 7a

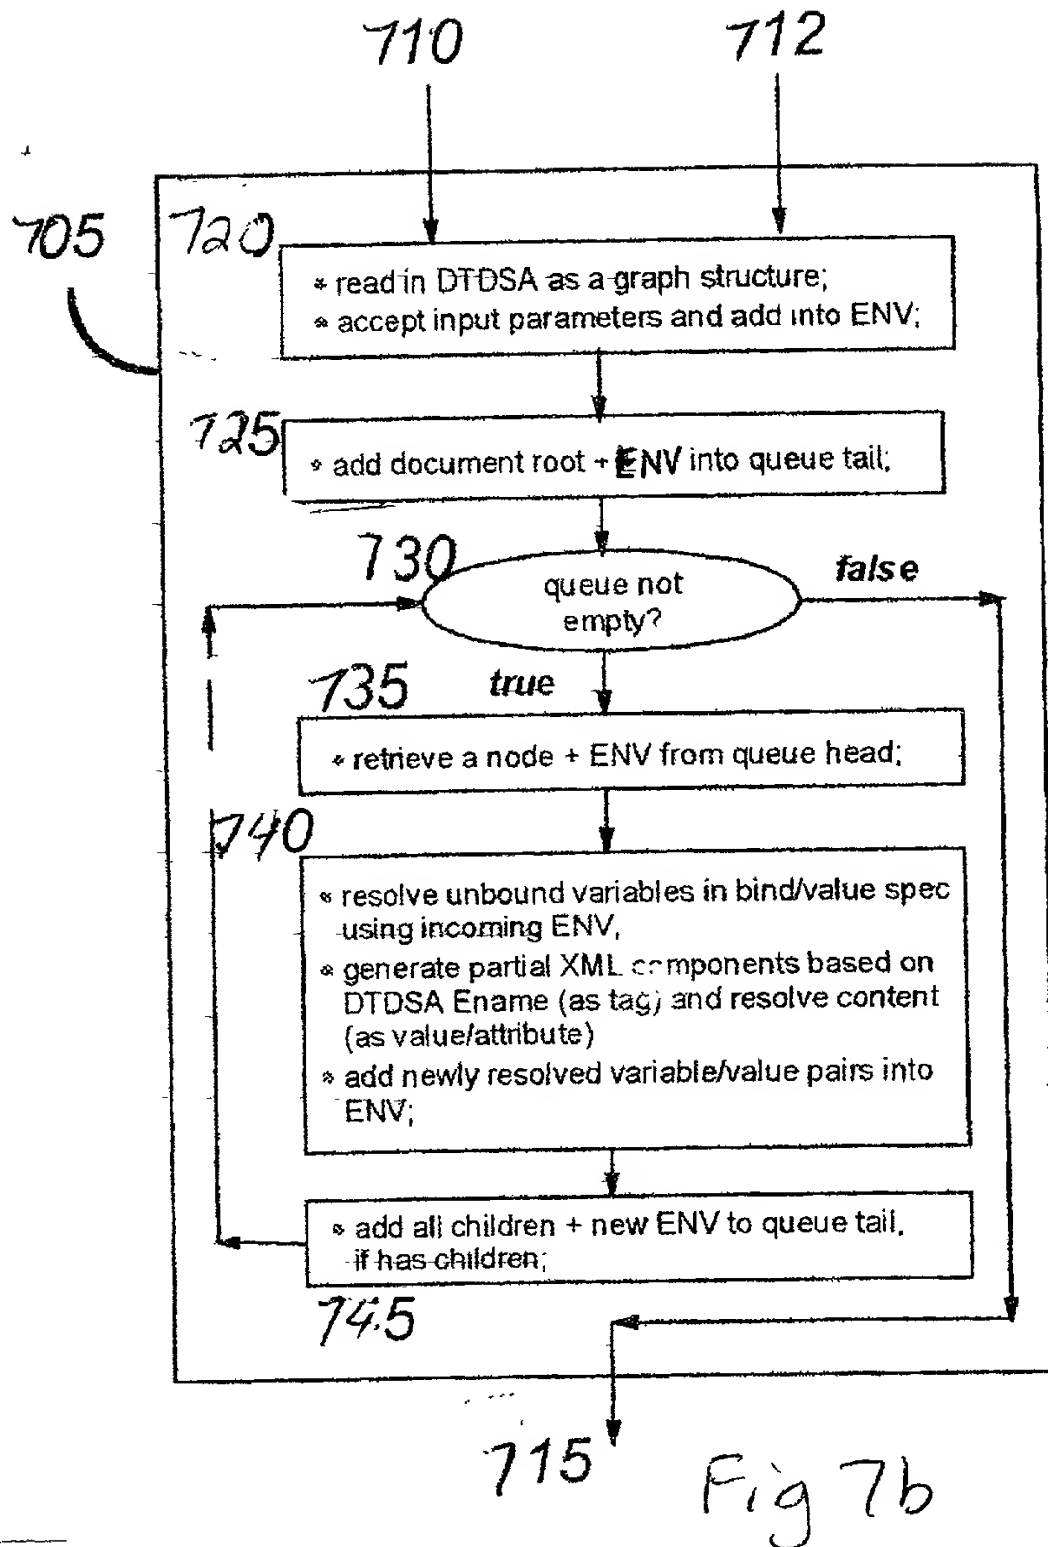

Algorithm for generating XML using DTDSA

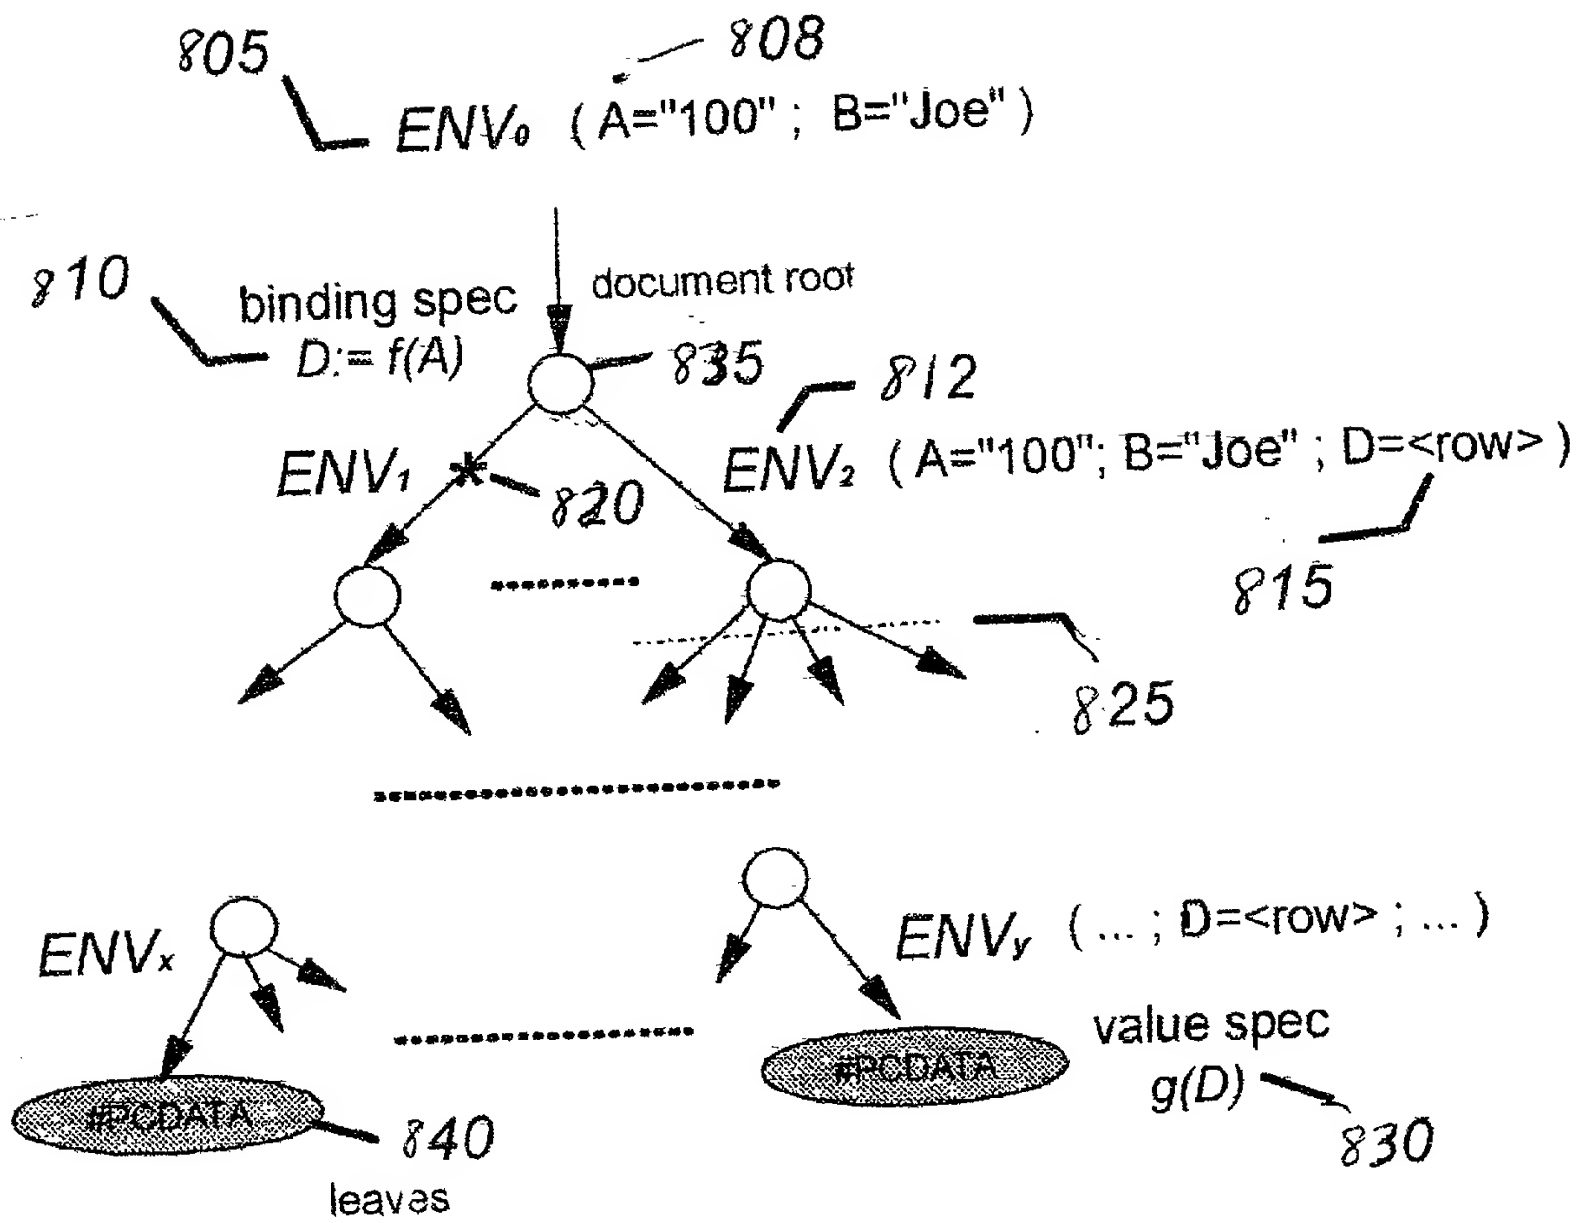


Figure 8 XML composition data flow

q 00 $x=100$

q 10 $r:=\text{row}(\text{PO}, \text{poid}, x=100)=\langle 100, 20, 10 \rangle$

q 05 $w:=\text{row}(\text{lineitem}, \text{poid}, 100)=$
 $\langle \langle 100, 35768, 20K \rangle, \langle 100, 35694, 100K \rangle \rangle$

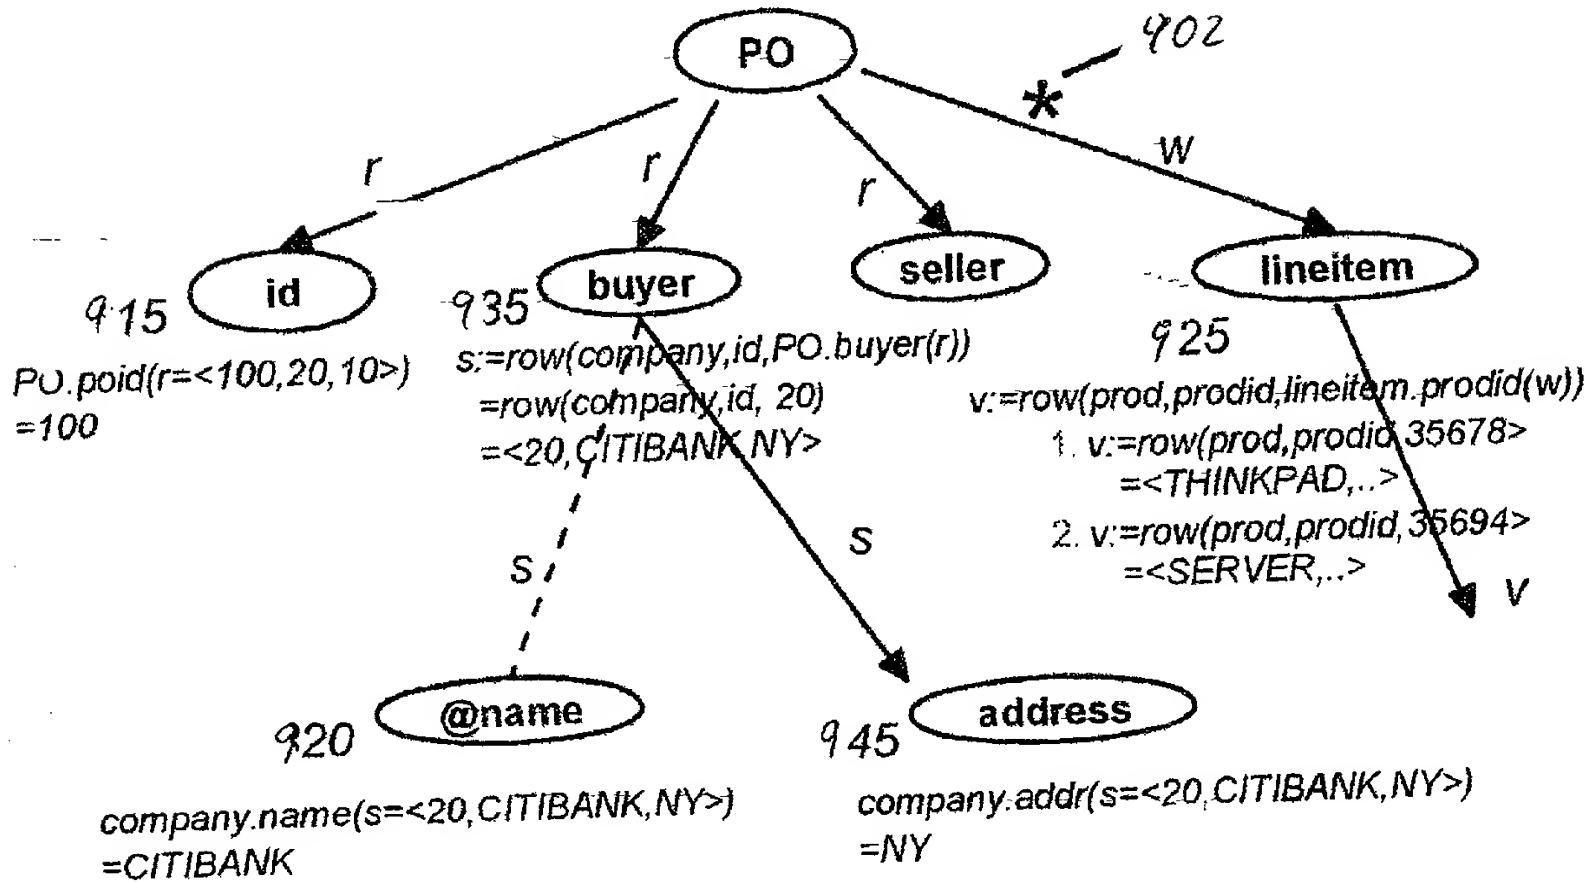


Figure 9 XML composition example with input $x=100$

```

<PO>
  <id> 100 </id>
  <buyer name="CITIBANK">
    <address> NY </address>
  </buyer>
  <seller name="IBM">
    <address> NY </address>
  </seller>
  <lineitem>
    <prodname> THINKPAD </prodname>
    <amount> 20K </amount>
  </lineitem>
  <lineitem>
    <prodname> SERVER </prodname>
    <amount> 100K </amount>
  </lineitem>
</PO>

```

Handwritten annotations in the image include:

- A line from `<id> 100 </id>` to `1005`
- A line from `<seller name="IBM">` to `1010`
- A line from `<lineitem>` to `1010`
- A line from `<lineitem>` to `1015`

Figure 10 Retrieved XML document (with input x=100)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: Ming-Ling Lo et al.

Date:

Serial No.:

Group Art Unit:

Filed: Herewith

Examiner:

For: METHOD AND APPARATUS FOR
CONVERTING BETWEEN DATA SETS
AND XML DOCUMENTS


ASSOCIATE POWER OF ATTORNEY

Commissioner of Patents and Trademarks
Washington, D.C. 20231

Dear Sir:

The undersigned attorney, who has been appointed as an attorney in the combined Declaration and Power of Attorney in the above-identified application, hereby appoints Anne E. Barschall, Reg. No. 31,089, as attorney to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. All correspondence should be directed to Anne E. Barschall, 80 Benedict Avenue, Tarrytown, New York 10591. Telephone calls should be directed to Anne E. Barschall at (914) 332-1019.

Respectfully submitted,



Wayne L. Ellenbogen
Attorney for Applicants
Reg. No. 43,602
(914) 945-2322

IBM Thomas J. Watson Research Center
P. O. Box 218 - 39-254
Yorktown Heights, NY 10598